


**D 400****AXIS™ Hinged Access Covers  
ULTRA™ Specification**

KDAX10



KDAX13

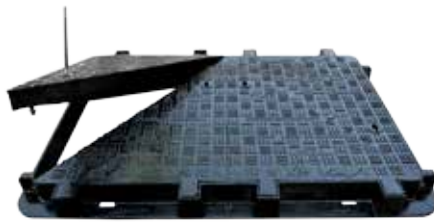

KDAX13 Fully Open

**Features:**

- Manufactured to BS EN 124 class D 400
- BSI Kitemarked for third party assurance of quality
- ULTRA™ products comply with HA 104
- ULTRA™ products comply with BS 7903
- Suitable for carriageways and fast moving traffic
- AMP™ patented anti-movement technology frames
- Maximum effort required to open hinged cover less than 25 Kg/f
- Supplied locked as standard with single captive bolt
- Sequenced opening for ease of use
- Frame mechanical lifting points
- Non-rock three point suspension for stability and silent operation
- Ductile iron to ISO 1083 for improved weight to strength ratio
- Black coated finish

**Options:**

- High Security Locking
- Badging e.g. FW, SW, Motorway Comms
- Sealing Plates
- Pressure Plates
- Safety Grids
- Security Plates

## Standard Sizes

Code	Clear Opening (mm)	O/all Frame (mm)	Frame Depth (mm)	Weight (kg)	D/Tri Lids
KDAX9	600 x 450	760 x 610	100	75	1
KDAX10	600 x 600	760 x 760	100	90	1
KDAX10-6	600 x 600	760 x 760	150	95	1
KDAX12	675 x 675	835 x 835	100	120	1
KDAX12-6	675 x 675	835 x 835	150	135	1
KDAX14	750 x 675	910 x 835	100	125	1
KDAX15	750 x 750	910 x 910	100	135	1
KDAX16	900 x 600	1060 x 760	100	125	1
KDAX16-6	900 x 600	1060 x 760	150	140	1
KDAX17	900 x 900	1060 x 1060	100	220	1
KDAX19	1220 x 675	1380 x 835	100	195	2
KDAX19-6	1220 x 675	1380 x 835	150	210	2
KDAX13	1310 x 850	1470 x 1010	100	250	2
KDAX30	1500 x 750	1660 x 910	100	255	4