


D 400
Access Covers
INTEGRITY™ Specification



KD100



KD900

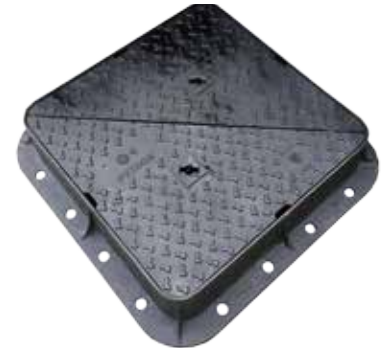

PYTHON 150

Features:

- Manufactured to BS EN 124 class D 400
- BSI Kitemarked for third party assurance of quality
- Suitable for lower intensity traffic
- AMP™ patented anti-movement technology frames
- Non-rock three point suspension for stability and silent operation
- Ductile iron to ISO 1083 for improved weight to strength ratio
- Black coated finish

Options:

- Standard Locking
- High Security Locking
- Badging e.g. FW, SW, Motorway Comms
- Sealing Plates
- Safety Grids
- Security Plates

Standard Sizes

Code	Clear Opening (mm)	O/all Frame (mm)	Frame Depth (mm)	Weight (kg)	D/Tri Lids
KD800	450 x 450	580 x 580	100	48	1
KD900	600 x 450	750 x 600	100	59	1
KD100	600 x 600	740 x 740	100	65	1
KD100-6	600 x 600	740 x 740	150	72	1
KD120	675 x 675	815 x 815	100	81	1
KD120-6	675 x 675	815 x 815	150	93	1
KD190	1220 x 675	1320 x 775	100	159	2

Standard Sizes

Code	Clear Opening (mm)	O/all Frame (mm)	Frame Depth (mm)	Weight (kg)	D/Tri Lids
PYTHON 100#	600 x 600	750 x 750	100	74	1
PYTHON 150#	600 x 600	750 x 750	150	77	1
WATT 100#	675 x 675	830 x 830	100	92	1
WATT 150#	675 x 675	840 x 840	150	103	1
SINCLAIR#	750 x 600	910 x 760	100	113	1
HUDSON 100#	1220 x 675	1365 x 830	100	213	2
HUDSON 150#	1220 x 675	1365 x 830	150	220	2
D1212*	1200 x 1200	1350 x 1350	150	415	2

#Suitable for carriageways but not HA 104 or BS 7903 compliant

*Does not conform to EN 124 due to size

