

**Total Working Volume = 500 Litres**

**x = 1 (Pedestrian Duty)**





Notes:-

1. Standard Minimum Pipework Size Is  $\text{Ø}110\text{mm}$ .
2. This Tank Can Be Installed In Either Granular Or Concrete Backfill - Please See Manual For Details
3. Cover Shown Is Pedestrian Duty

Product	Size
NSG	01

Standard Connections Sizes	
y	Connection ( $\text{Ø}$ )
A	$\text{Ø}110$

Z	Branding
K	Klargester

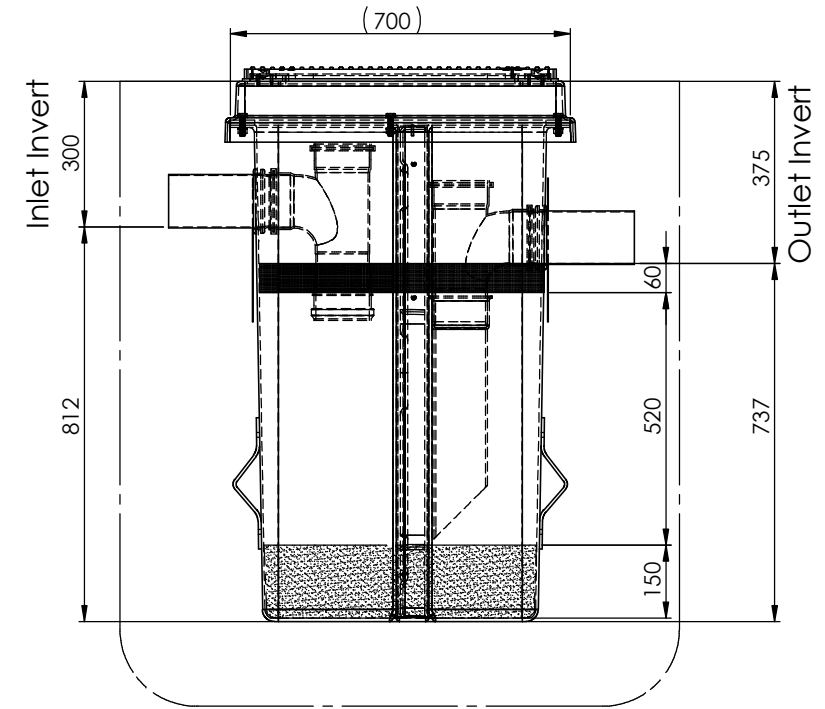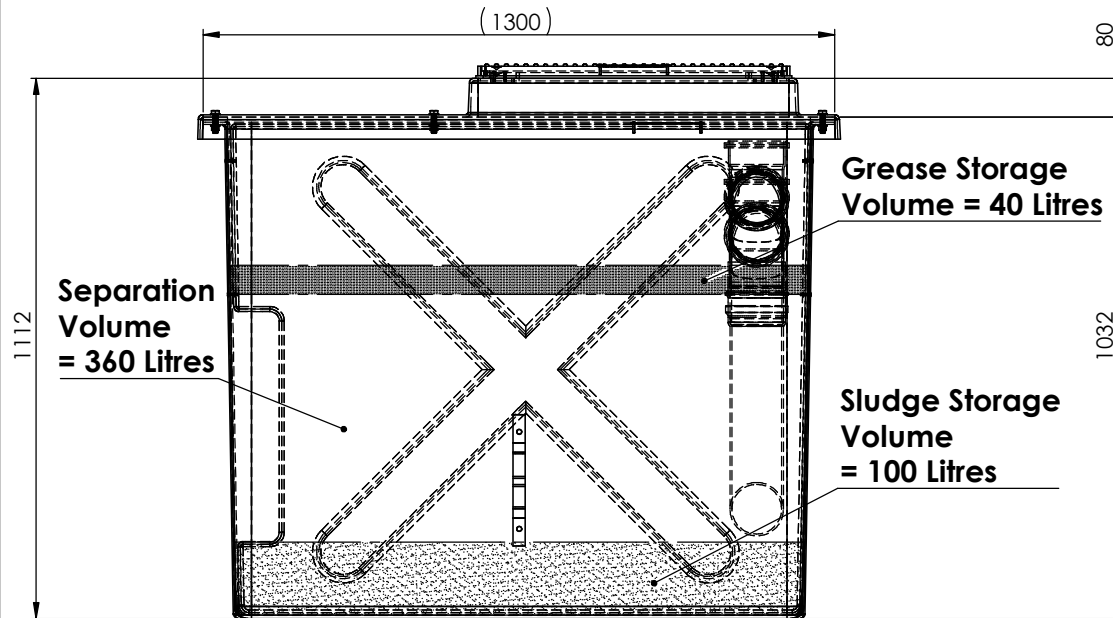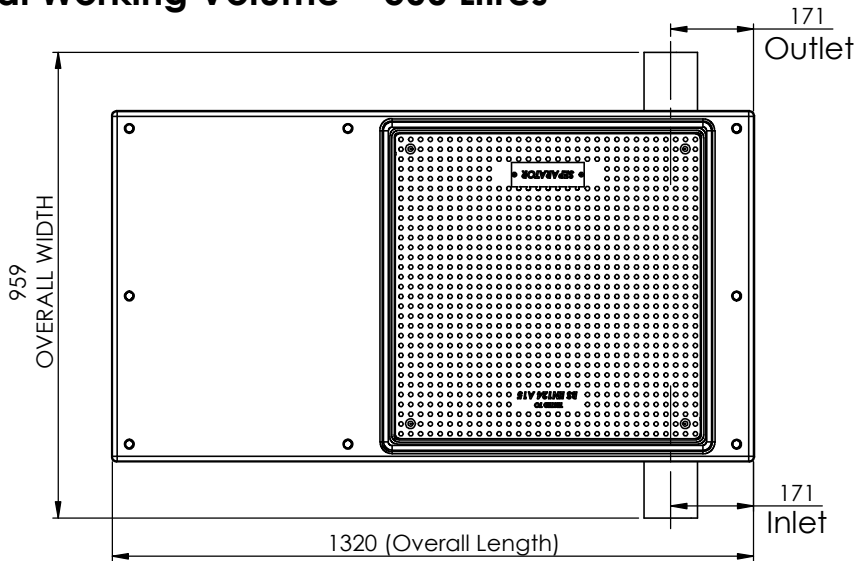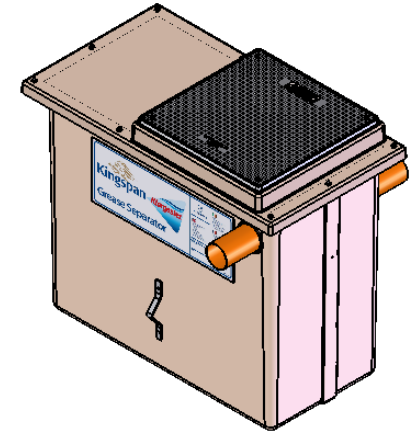

**Cover Loading = EN124 Class A15:- 1.53 Tonne Test Load**

Please Check with Kingspan Environmental For The Latest Issue Of This Drawing

Issue	Date	Drawn by	Approved by	Description
02	24/08/16	W.DYER		CC1332
01	26/02/16	L.Steward		CC1293 - Release Of NSG01 & 02

Material : Various	Tolerance (unless stated) :
Finish :	Thickness : n/a
Weight : 70.44 Kg	Surface Area : m <sup>2</sup>
Modelled By : Name	


**Drawing : DS1279P**

Page 1 of 3

NSG01 Grease Separator (500L)

All Dimensions In mm

Scale: Do Not Scale




Third Angle Projection

Kingspan Environmental reserve the right to alter the details of this drawing without prior notice. This drawing is copyright and may not be reproduced or used without the written permission of Kingspan Environmental




x = 2 (Vehicular Duty)

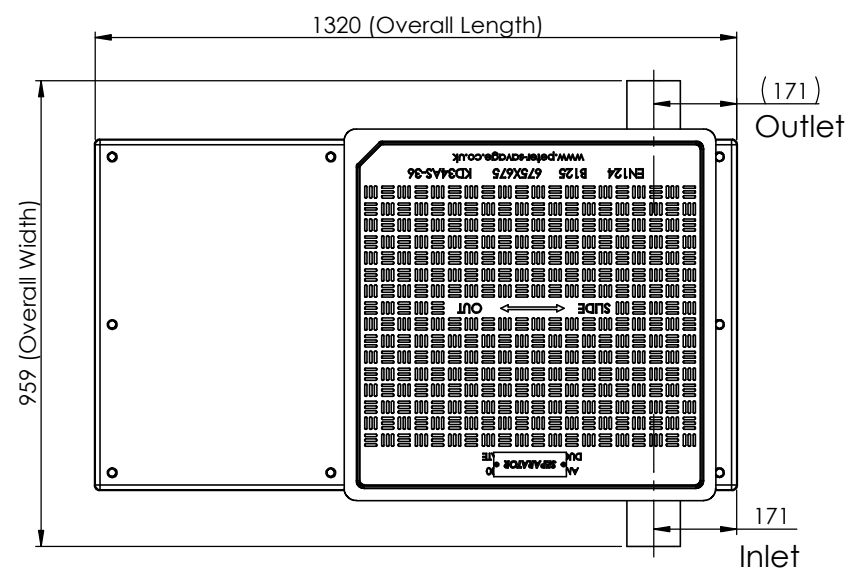



Notes:-

1. Standard Minimum Pipework Size Is Ø110mm.
2. This Tank Can Be Installed In **Concrete Backfill Only** - Please See Manual For Details
3. Cover Shown Is Vehicular Duty
4. **Cover To Be Supplied Loose With The Unit.**
5. **Vehicular Duty Cover MUST Be Installed Over The Concrete & Not The GRP, Vehicle Load To Be Transferred To The Concrete Surround.**

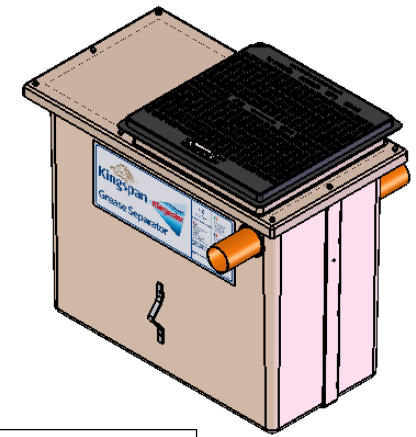

Product	Size
NSG	01

Standard Connections Sizes	
y	Connection (Ø)
A	Ø110

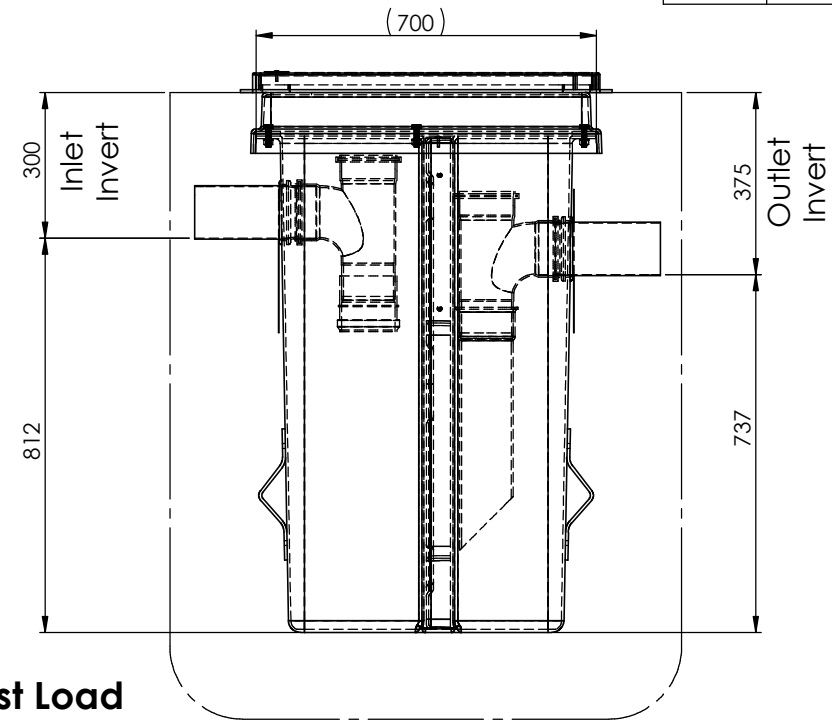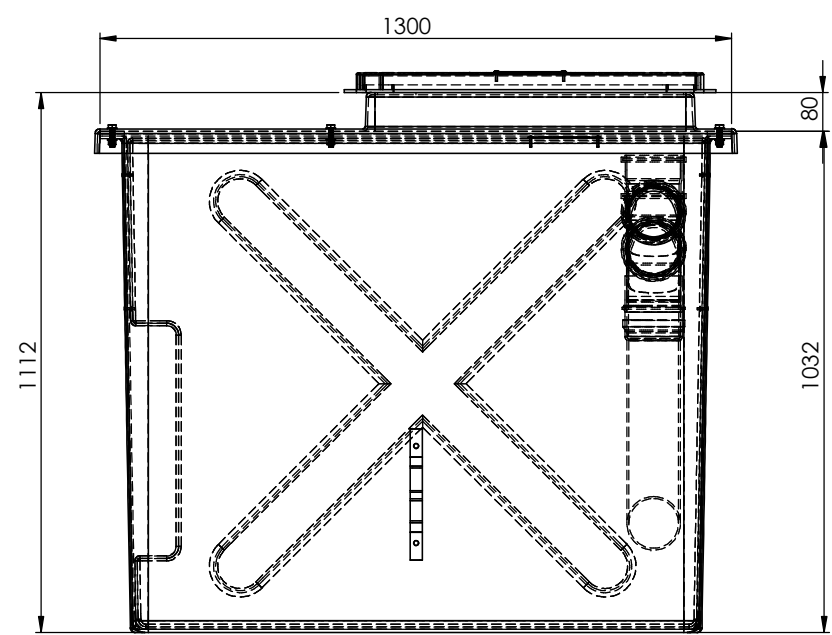

Z	Branding
K	Klargester

**Cover Loading = EN124 Class B125:- 12.5 Tonne Test Load**

Material : Various	Tolerance (unless stated) :	<b>Drawing : DS1279P</b>	Page 2 of 3
Finish :	Thickness : n/a		
Weight : 70.44 Kg	Surface Area : m²		
Modelled By : Name			
		NSG01 Grease Separator (500L)	

All Dimensions In mm      Scale: Do Not Scale      Third Angle Projection

Z:\Drawing Data\02 - Sales Drawings\DS\DS - 12\DS1279P


Kingspan Environmental reserve the right to alter the details of this drawing without prior notice. This drawing is copyright and may not be reproduced or used without the written permission of Kingspan Environmental




# Strapping Details

## Notes:-

1. Holding Down Straps Are Supplied By Others.
2. Use Only One Strap Per Anchor Point
3. Deadmen Help Anchor Tanks In Installation's In Which There Is Potential For A High Water Table Or Trapped Water.

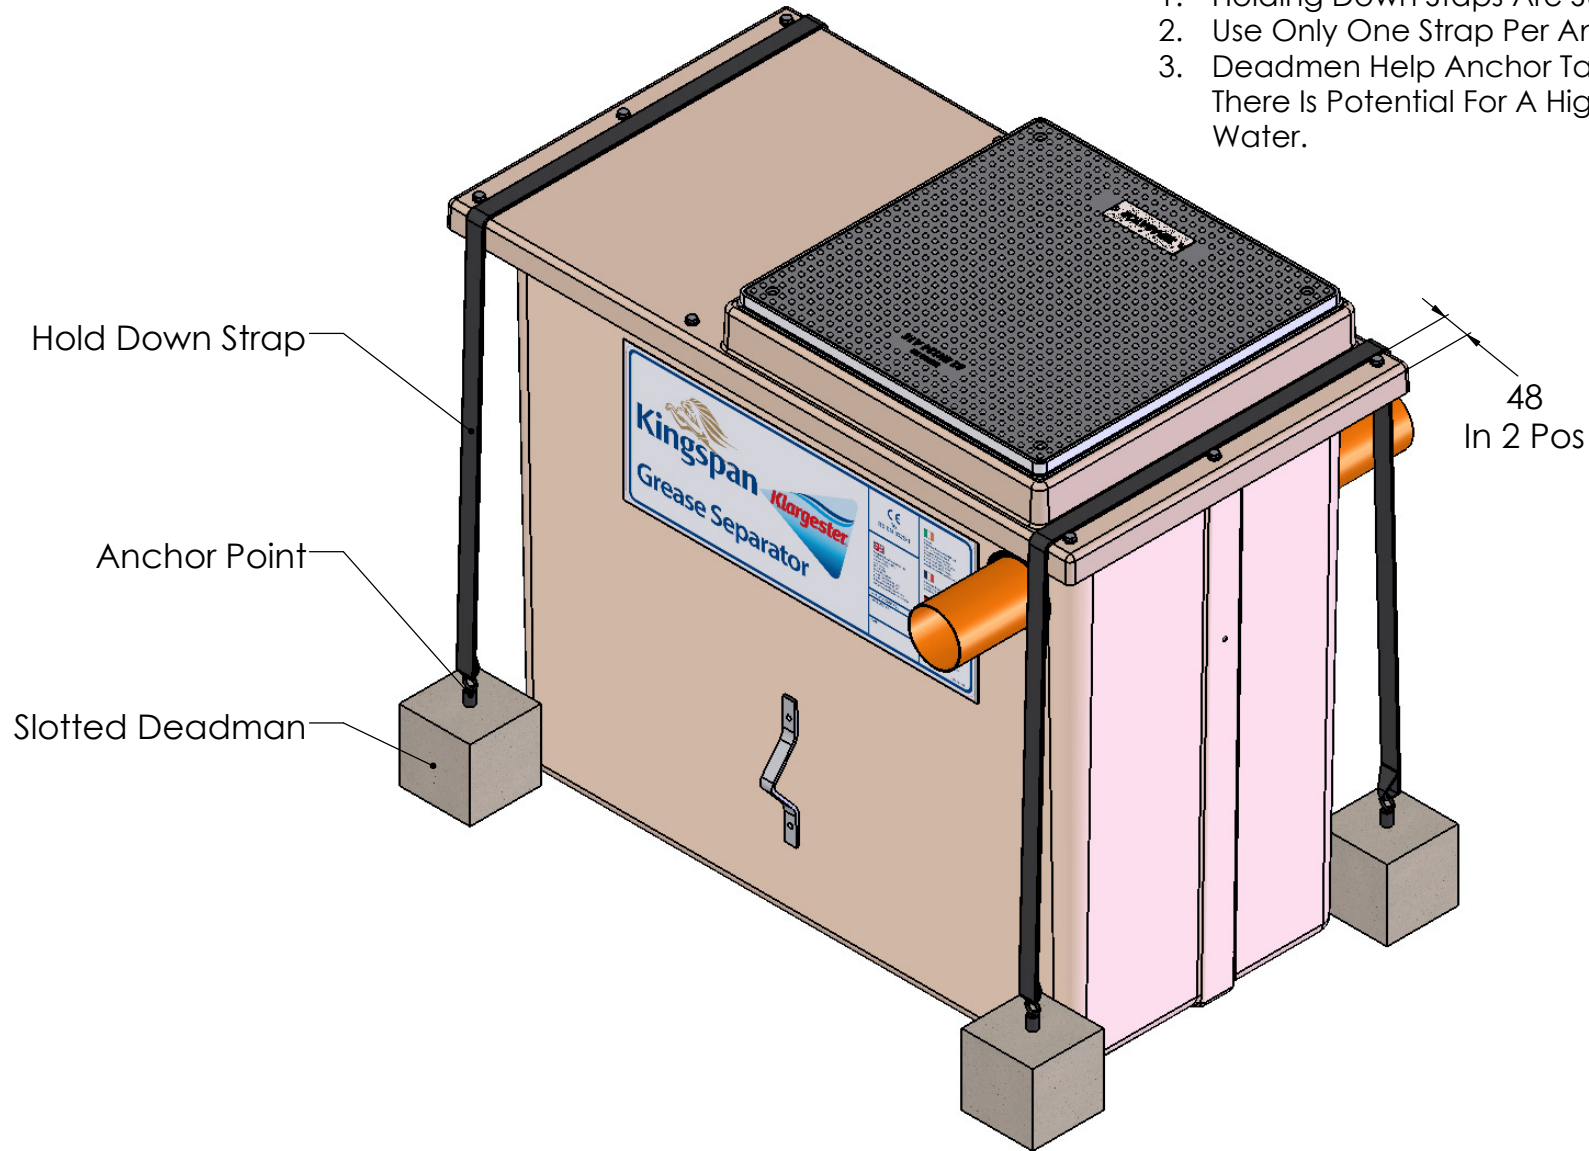

Material : Various	Tolerance (unless stated) :	<b>Drawing : DS1279P</b>	Page 3 of 3
Finish :	Thickness : n/a		
Weight : 70.44 Kg	Surface Area : m <sup>2</sup>	NSG01 Grease Separator (500L)	
Modelled By : Name			

All Dimensions In mm	Scale: Do Not Scale	 Third Angle Projection
Z:\Drawing Data\02 - Sales Drawings\DS\DS - 12\DS1279P		

Kingspan Environmental reserve the right to alter the details of this drawing without prior notice. This drawing is copyright and may not be reproduced or used without the written permission of Kingspan Environmental

