DATA SHEET

11/11/2015 Page 1 / 3

DAB PUMPS S.p.A.
Via Marco Polo, 14 - 35035 Mestrino (PD), Italy
Tel. +39 049 5125000 - Fax +39 049 5125950
www.dabpumps.com

Receiver		From	
Society		DAB Pumps LTD	
Reference		Mehmet, Nick	
Address		-	
Phone		0788137678	
Fax		-	
E-mail		nick.mehmet@dwtgroup.com	

Item n° :
103040050

Model :
FEKA VS 750 M - NA

Pump data

Free passage :	50 mm
Pressure rating :	
Min. fluid temperature :	0
Max. fluid temperature :	50 °C
Max. Ambient temperature :	40 °C

Requested data

Flow :	0 l/s
Head :	0 m
Fluid :	Water
Fluid Temperature :	20 °C
Density :	62.315 lb/ft³
Kinematic viscosity :	1.0769E-5 ft²/s
Vapor pressure :	2.2045 kPa

Hydraulic data (duty point)

Flow :

Head :

Materials

Pump body	Stainless Steel (AISI 304)
Impeller	Stainless Steel (AISI 304)
Motor shaft	AISI 316
Seal disk	Stainless Steel (AISI 304)
Motor casing	Stainless Steel (AISI 304)
Protection cover	Stainless Steel (AISI 304)
Mechanical seal pump side	Silicon carbide/Silicon carbide

Curve tolerance according to ISO 9906

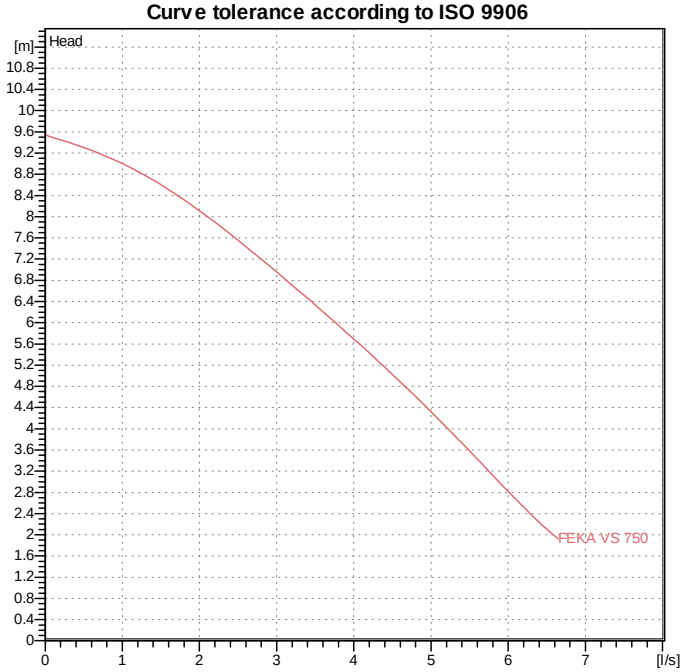

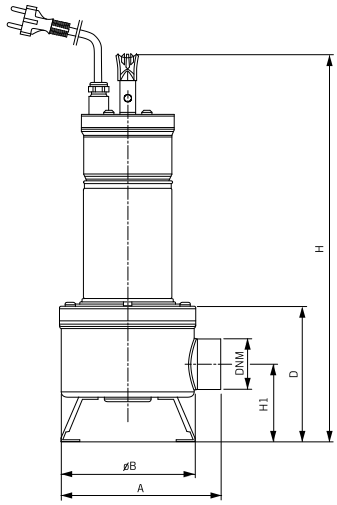

Motor data

Motor brand :	DAB	
Nominal power P2 :	1.0058 hp	
Rated speed :	2800 rpm	
Rated voltage :	1~ 220-240 V	50 Hz
Nominal current :	5.13 A	
Degree of protection :	IP 68	

Weight : 38.58 lb

Dimensions in mm

A	203
B	170
D	172
DNM	2" F
H	492
H1	98

Pump connection

Suction side :		/
Discharge side :	2 " F	/ --

DAB PUMPS reserves the right to make modifications without notice