


### SCB4-47 0.55kW 1PH PERFORMANCE CURVES

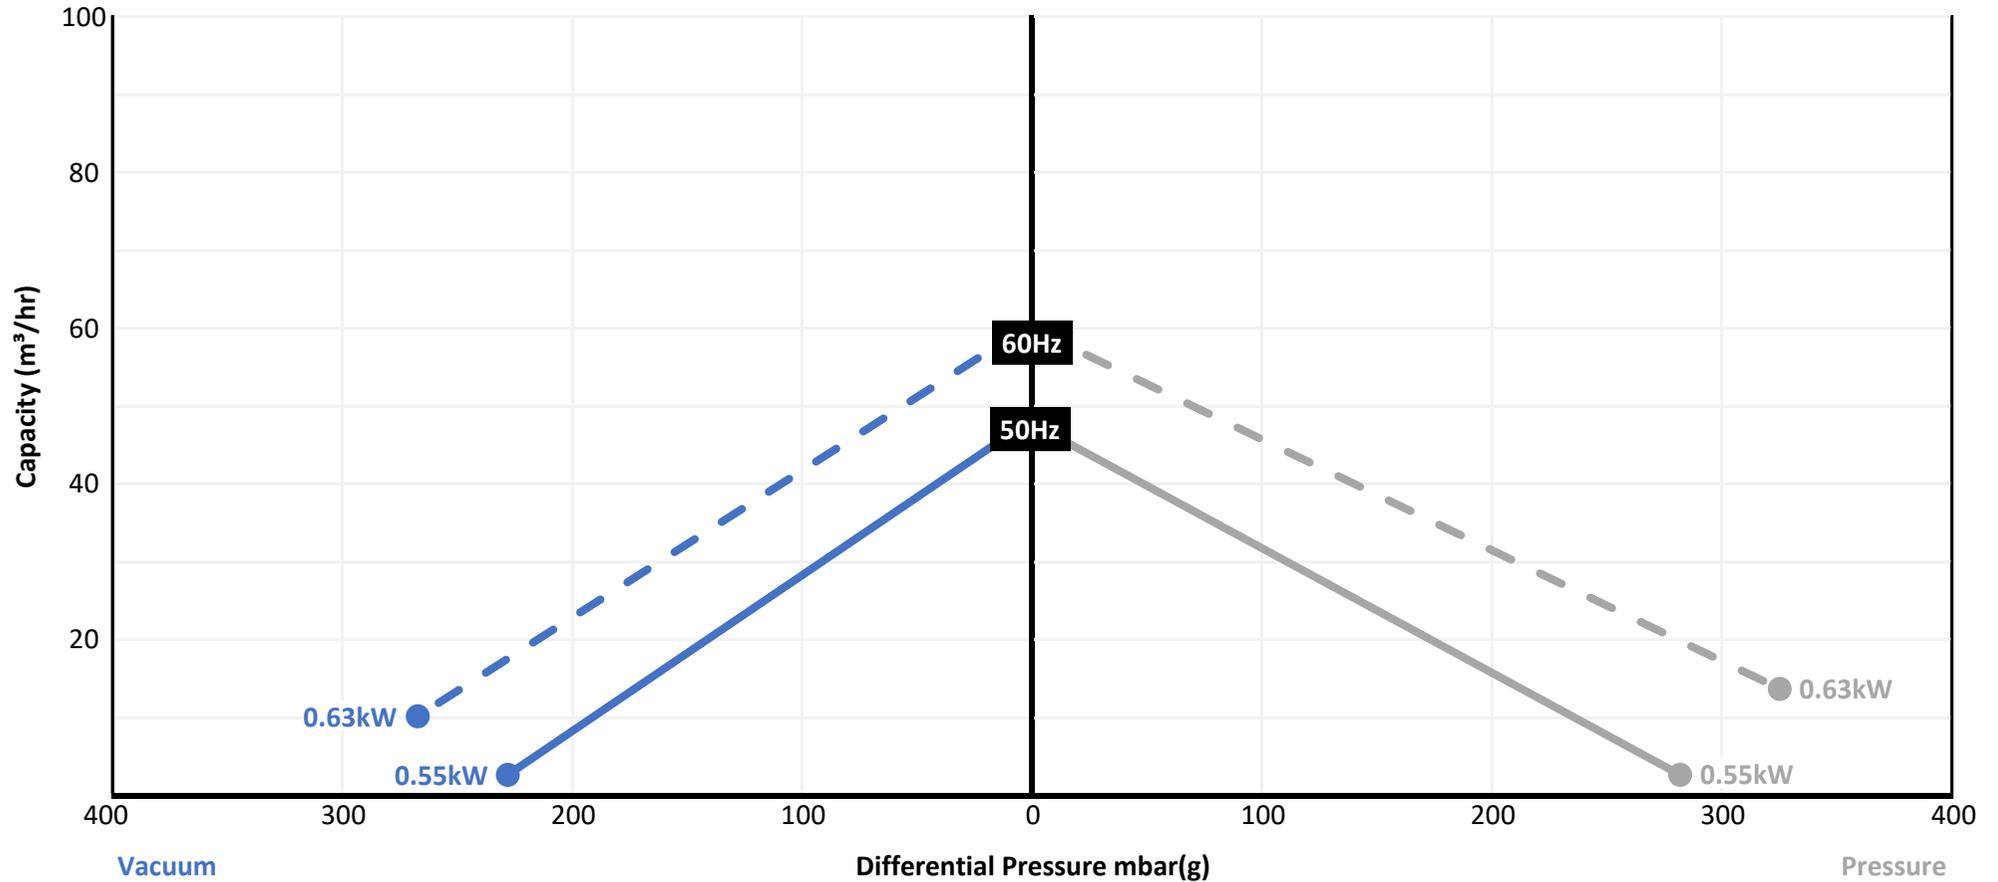

Model reference	Freq.	Motor	Voltage	Current (A)	Weight	Noise level	Freeflow	Max. Vacuum	Max. Pressure
SCB4-47-0.55kW-1PH	50Hz	0.55kW	220-240V	3.0	18kg	57dB(A)	47m³/hr	-230mbar(g)	290mbar(g)
	60Hz	0.63kW	220-240V	3.0		62dB(A)	57m³/hr	-270mbar(g)	320mbar(g)

Performance curves are provided as a guide, based on air at an ambient temperature of 15°C at an atmospheric pressure of 1013 mbar with a tolerance of ± 10%. The maximum pressure differentials are valid for suction and ambient temperature up to 25°C.

This machine can be used for either vacuum or pressure duty in continuous operation. For other conditions please discuss with us. Motors are IP55 with insulation class F and versions are UL/CSA approved.