


SCB4-87 1.1kW 1PH PERFORMANCE CURVES

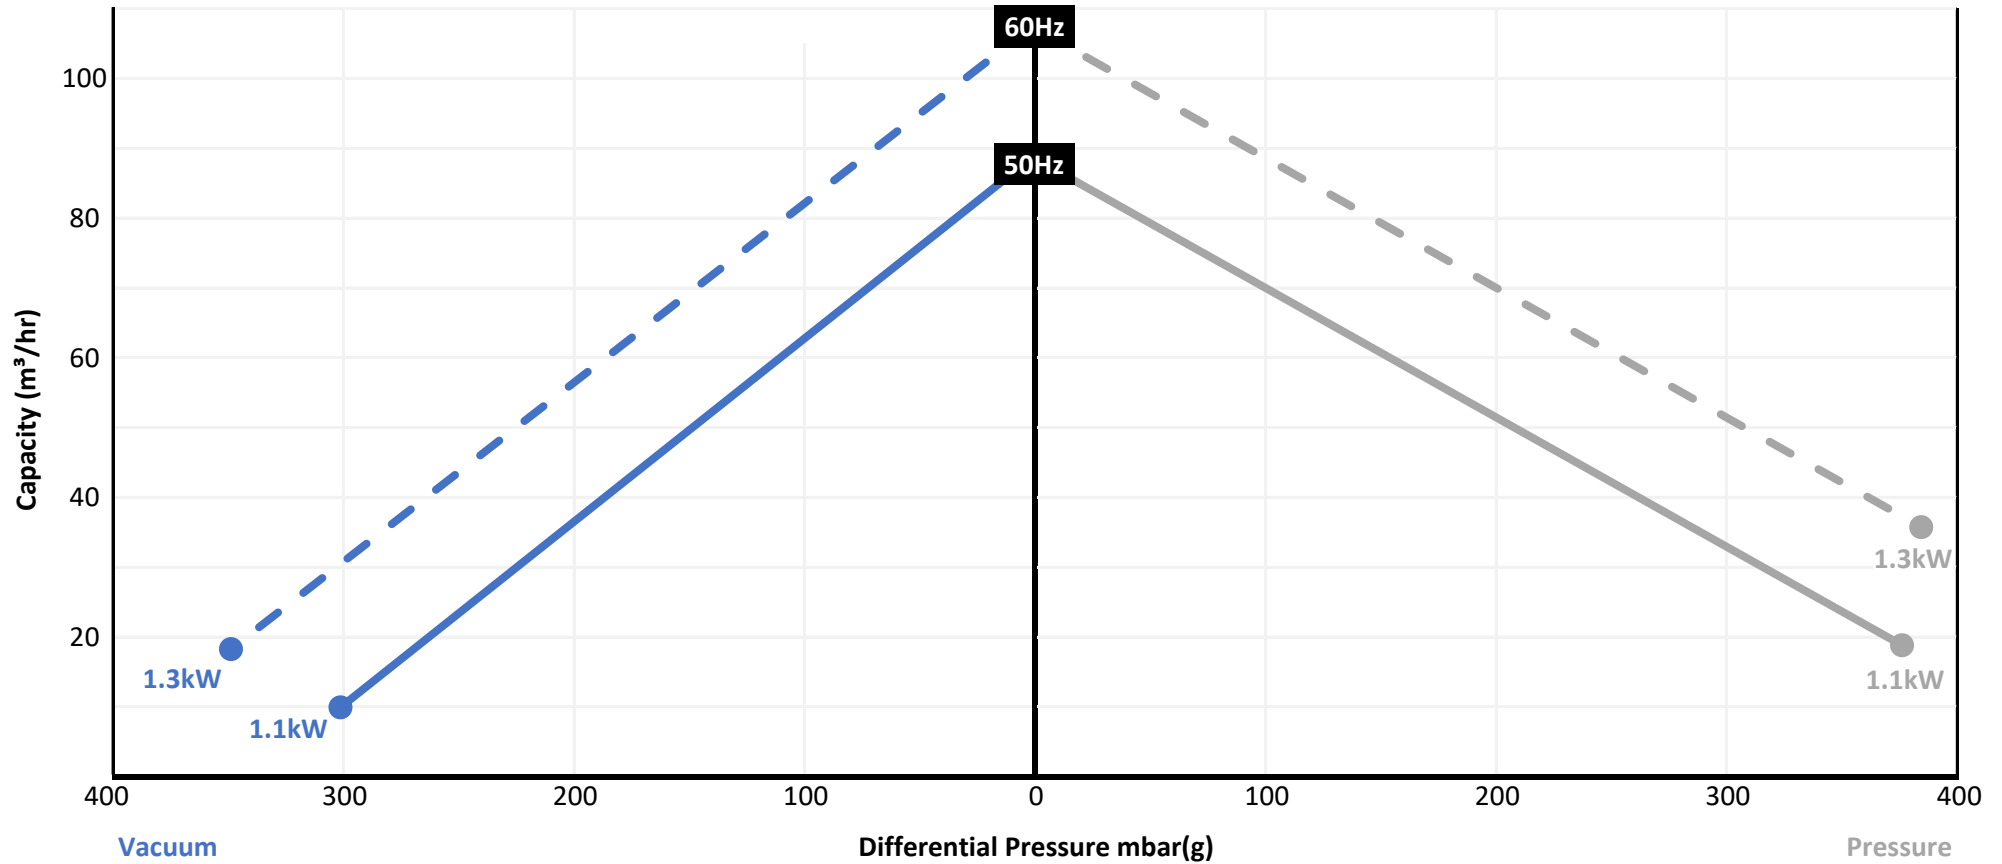

Model reference	Freq.	Motor	Voltage	Current (A)	Weight	Noise level	Freeflow	Max. Vacuum	Max. Pressure
SCB4-87-1.1kW-1PH	50Hz	1.1kW	220-240V	9.0	23kg	58dB(A)	87m³/hr	-300mbar(g)	380mbar(g)
	60Hz	1.3kW	220-240V	9.5		63dB(A)	105m³/hr	-350mbar(g)	390mbar(g)

Performance curves are provided as a guide, based on air at an ambient temperature of 15°C at an atmospheric pressure of 1013 mbar with a tolerance of ± 10%. The maximum pressure differentials are valid for suction and ambient temperature up to 25°C. This machine can be used for either vacuum or pressure duty in continuous operation. For other conditions please discuss with us. Motors are IP55 with insulation class F and versions are UL/CSA approved.