


PS6000


Single Recessed Block Pavior Infill Cover & Frame FACTA Class AA, AAA, B, C, D



Section through detail.

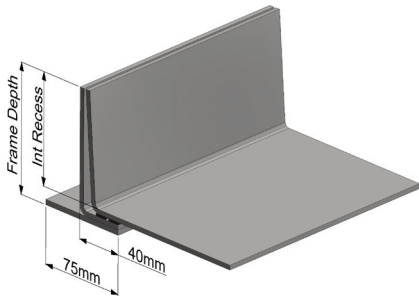

Corner Detail

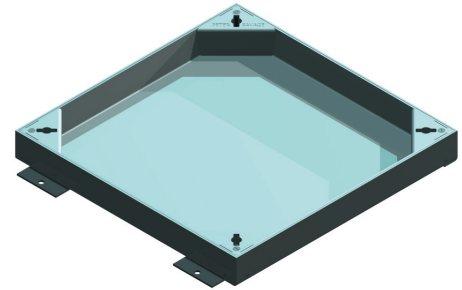

Single recessed block pavior infill cover and frame. Recessed lids are designed to enable either either a block or slab infill. The lids are underbraced where necessary to meet the stated load rating. All products are manufactured under an ISO 9001 Quality system. This product is hot dip galvanised to BS EN ISO 1461 as standard.

Options:

- Stainless Steel Grade 304 Edging
- Stainless Steel Grade 316 Edging
- Locking - Slotted Head
- Locking - Allen Head
- Locking - Hex Pin
- Unsealed
- Single Polyethylene Seal
- Double Polyethylene Seal
- Badged i.e. Water, Gas
- M12 Threaded Lifting Points

Standard Sizes

Clear Opening (mm)	Suffix	Clear Opening (mm)	Suffix
300 x 300	A	750 x 750	F
450 x 450	B	900 x 600	G
600 x 450	C	900 x 750	H
600 x 600	D	900 x 900	J
750 x 600	E		

[Non-standard sizes available](#)

Product Loading codes: FACTA Class AA = PS6001
 FACTA Class AAA = PS6002
 FACTA Class B = PS6004
 FACTA Class C = PS6005
 FACTA Class D = PS6006

Internal Depth Options

Block Size	Internal Recess	Frame Depth	Code
up to 50 mm	70 mm	83 mm	7
up to 65 mm	90 mm	103 mm	9
up to 80 mm	100 mm	113 mm	1
up to 100 mm	130 mm	143 mm	3

Specification/Ordering:

Please choose the product load code, size and lid recess suffix, and any extras i.e. PS6004D7 Stainless/Slotted